

SEALING LIQUID MONITOR

Model SLMx-2 for double mechanical seals

KYTOLA® Sealing Liquid Monitor model SLMx-2 protects your seal and reduces downtime of pumps, agitators, refiners, screens etc. Significant savings are achieved in maintenance and seal water costs.



Model SLM2-2



FEATURES

- Reliable operation
- Solid construction
- Reduced seal maintenance
- Built-in cleaner does not interfere with operation
- Excellent corrosion and heat resistance
- All models are alarm-ready
- Clear metering scale

OPTIONS

- Pressure gauge
- Floor mounting stand
- Hoses and hose barb connectors for pump
- Check valve
- Alarm sensor

SLMx-2





Technical data SLMx-2

Body material
Metering tube
Metallic parts
O-ring seals
Max. pressure
Max. temperature
Connectors
Weight

POM
Borosilicate glass (PSU optional material, code "M")
AISI 316, float AISI 329
Viton®
20 bar
100°C
10 mm hose barb connectors
2,4 kg incl. package

SLM	-2-	-	
CONNECTORS			
			10 mm hose barb connectors
R			10 mm straight tube connectors for compression fittings
N			3/8" straight tube connectors for compression fittings
ACCESSORIES			
A			Ind. prox. sensor 20 - 250 VAC/DC (ILK-M18-AB)
F			Ind. prox. sensor 10 - 55 VDC (ILK-M18-FR)
G			Pressure gauge, 0 - 10 bar (PMIA10K)
E			Pressure gauge, 0 - 25 bar (PMIA25K)
M			PSU -metering tube
S			Floor mounting stand (ZASJA1SLM)
RANGE CODE			
	Flowrate	Adjustable alarm range	
1	0,05 - 1,0 l/min	0,1 - 0,45 l/min	
3	0,1 - 3,0 l/min	0,3 - 1,2 l/min	
8	0,5 - 8,0 l/min	0,8 - 3,0 l/min	
15	1 - 15 USGPH	1,6 - 7,1 USGPH	
50	2 - 50 USGPH	4,8 - 19 USGPH	
2	0,1 - 2,0 USGPM	0,2 - 0,8 USGPM	

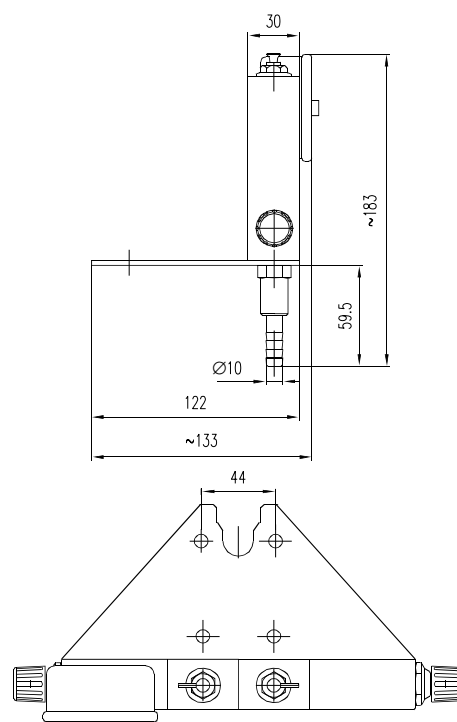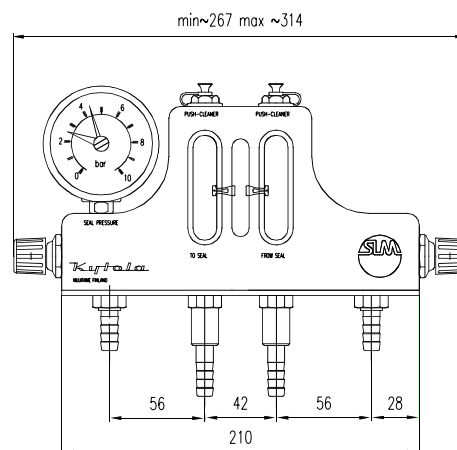

MANUFACTURER

Kytola
INSTRUMENTS

LOCAL
REPRESENTATIVE

中国一级代理：
苏州维多亚自动化电气设备有限公司
电话：0512-67079947
传真：0512-67079949
地址：苏州市天灵路23号长江节能科技产业园C-416